


Quad DVB-S2 CI – Quad DVBT/C with double slot C.I. “all in one” Compact Headend

D-Matrix

D-MATRIX-4S EVO

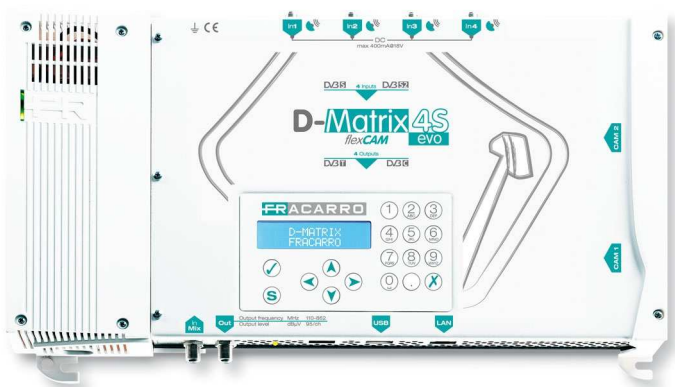

The new **D-Matrix-4S EVO** compact headend will introduce many innovative features.

By using the **D-Matrix-4S EVO** is possible to tune up to 4 independent satellite HD or SD transponders coming from the four inputs, decrypt the contents through the Professional CAMs and remodulate the programs on the four “customized” output digital multiplexes.

The digital output programs become twice!!

Now it's possible to create up to four DVB-T or DVB-C “ad-hoc” digital multiplexes. In this way the installer could deploy many digital contents through every MATV coaxial network.

NEW ABSOLUTE FEATURE: thanks to the new **FlexCAM** operation mode feature, it's possible to decrypt many programs coming from the different SAT inputs, by using the same CAM module (i.e. *Flexible CAM on the OUTPUT*). **D-Matrix-4S EVO** is equipped with two universal slots Common Interface that can be both used **FlexCAM** operation mode.

THE WEB INTERFACE MANAGEMENT HAS BEEN IMPROVED: now the main informations are available quickly !!

With the compact headend is always possible to manage the external Audio/Video file playback stored in the pendrive (**TS** file format).

D-MATRIX-4S EVO Fully manageable parameters for all the output muxes and for the individual programs (LCN, SID, PDSD, NIT, ...).

Main Specifications (*)

- **Multi SAT Input:** 4 independent SAT input (DVB-S2), 4 DVB-T or DVB-C output mux (two pairs of adjacent digital modulators), 2 Common Interface slots.
- **Optimized CAMs Management:** the new D-MATRIX-4S EVO allows to manage both CAMs modules in two different operation modes:
 - o **FlexCAM mode:** it can be forwarded to the same CAM module the programs coming from any SAT input (i.e. Flexible CAM on the OUTPUT)
 - o **STANDARD mode:** each CAM module can be associated with a SAT input SAT in order to decrypt the encoded programs coming only from this specific input.
- **WEB interface based headend: today is even more intuitive.** The headend setup, and configuration must be done by using the improved web interface built-in; basic setup available by on board keyboard.
- **“Mux-ad-Hoc”:** you can create all the muxes with the choosen programs tuned from up to 4 satellite transponders and manage all the descriptor parameters of each mux (ONID, TSID, NetID,...) and each program inside the mux (LCN, SID, PID, Program name..).
- **ARP 2.0** = Automatic Recovery Procedure to save the higher priority programs and guarantee Continuity of Service when bit rate overflows occur. All the program are sequentially restored when the global bit rate returns within the limits.
- **AUTO REMAPPING function:** you can change in real time the program inside the mux without rescanning all the TV set along the network.
- **USB Port** to upload/download pre-setted set up or for the firmware upgrade, video playback (TS file format).
- **DVB-T/DVB-C “agile output modulation” selectable via sw:** one product to fit every coax network distribution.

		D-Matrix-4S EVO (*)	
Fracarro code		283132	
Front-End			
N° input	N°	4	
Input frequency	MHz	950÷2150	
Input level	dBµV	50÷80	
Input step tuning		1MHz	
LNB control		0/14/18VDC, 0/22KHz, DiSEqC 1.0	
Demodulation		DVB-S2 (8-PSK, QPSK), DVB-S (QPSK)	
FEC		1/2, 2/3, 3/4, 5/6, 7/8, AUTO	
Symbol rate	MS/sec	2 ÷ 45 (DVB-S/ DVB-S2)	
AFC Range		-5 ÷ +5MHz	
Output Modulation			
N° of generated mux	N°	4 (two pairs of adjacent digital multiplexes)	
Trasmission standard		DVB-T	DVB-C
Bandwidth	MHz	6, 7, 8	(depends on the output SR that was set)
Carriers		2k, 8k	-
Modulation		QPSK, 16-QAM, 64-QAM	16QAM, 32 QAM, 64QAM, 128QAM, 256QAM
Guard interval		1/4, 1/8, 1/16, 1/32	-
FEC		1/2, 2/3, 3/4, 5/6, 7/8	Reed Solomon (204, 188)
Symbol Rate	Msymb	-	1000 to 6999
Spectrum		Normal/Inverted	
Operating Mode		Normal, Single Carrier	

RF Output		
Output frequency	MHz	111÷862
Output channels		S2÷E69
Output step tuning	KHz	250
Typical RF output level	dB μ V	95
Output level adjustment	dB	0÷20
Flatness	dB	\pm 1.5
Typical Output MER	dB	36
Spurious rejection	dBc	< -50

General features (*)		
RF mix input	MHz	47÷862
RF insertion loss	dB	2.5
Mains Supply	Vac, Hz	230, 50/60
Typical Power Consumption	W	42 (with two CAMs inserted)
Connectors	Type	F female (RF), RJ45 (programming via web interface), USB (fw upgrade, TS video file playback)
Common Interface		2 x PCMCIA (Standard EN50221, TS10169) , FlexCAM or STANDARD mode
Dimensions (L.x W.x H)	mm	360x230x54 (without CAM inserted) – 385x230x54 (with CAM inserted)
Operating temperature	$^{\circ}$ C	-5 ÷ +55 (without CAM)
Compliant		EN50083-2, EN60065

(*)Definitive specifications may change without notice.

Installation Examples

PENTA85

FR

PT100C

400mA@14V total max power supply

D-MATRIX

To the distribution →

4 MUX generated, 95dBuV per mux

The new D-MATRIX-4S EVO headend can tune up to four different SAT trasponders, decrypt the programs (through CAMs & Smart-Cards – **NOT INCLUDED**) and generate four separate full-band RF Digital Multiplex (DVB-T or DVB-C), 95dB μ V each.

Remote supply for LNB is available (max 400mA@14V total).

All settings can easily be made using the integrated WEB INTERFACE.

